


MCO-7S

Miniature SMD Clock Oscillator
CMOS


QuartzCom
the communications company



Features

- Applications: telecommunications, wireless communications
- Sub miniature package: 2.0 x 1.6 x 1.0 mm
- Frequency from 0.75 MHz up to 80 MHz
- High shock and vibrational resistivity


Parameter	Specification		
	MCO-7S18	MCO-7S25	MCO-7S3
Frequency range	0.75 ~ 80 MHz		
Standard frequencies	4.0, 12.0, 16.0, 20.0, 24.0, 26.0, 32.00, 38.40, 40.0 & 75.0 MHz		
Frequency stability (*)	±25 ~ ±100 ppm		
Supply voltage	+1.8 V ±5 %	+2.5 V ±5 %	+3.3 V ±5 %
Supply current	< 7 mA	< 8 mA	< 10 mA
Output signal	CMOS		
Output level	V _{OH} ≥ 0.9 Vdc		V _{OL} ≤ 0.1 Vdc
Output load	15 pF		
Symmetry	45 ~ 55 %		@ ½ Vdc
Rise / fall time	3 ~ 5 ns		
Tri-state function	pin #1 = high or open pin #1 = low		pin #3 → signal pin #3 → high impedance
Operating temperature range	-20 ~ +70 °C -40 ~ +85 °C		commercial application industrial application
Storage temperature range	-55 ~ +125 °C		
Packaging units	tape & reel		1'000 or 2'500 pieces
(*) All inclusive: frequency stability vs. temperature, tolerance, aging, supply & load variation			
Customer specifications on request			

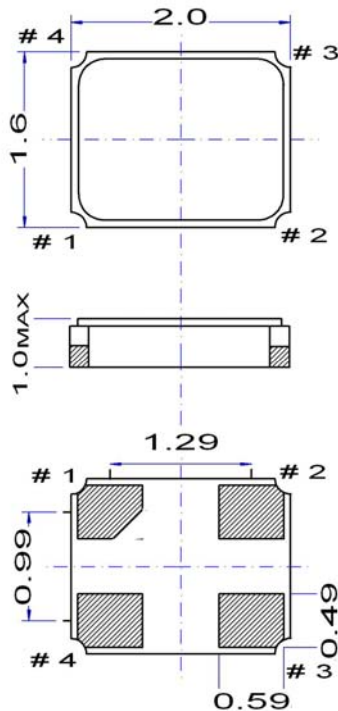

Pin function

- # 1 Tri-state
- # 2 GND
- # 3 Output
- # 4 Vdc

Example for solder pattern



Do not design any conductive path between the pattern

Example for IR reflow soldering temperature

