

# ULTRA MINIATURE CERAMIC SMD CRYSTAL



3.2 x 2.5 x 0.75mm

ABM8-166-114.285MHz-T

 RoHS/RoHS II Compliant

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable

## FEATURES:

- Low in height; suitable for thin equipment, 0.75mm max
- Seam sealed package assures high reliability
- Suitable for RoHS reflow

## APPLICATIONS:

- For use with SiLab Part Number Si5316

## STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency		114.285		MHz	
Operation Mode	3 <sup>rd</sup> OT, AT-Cut				
Operating Temperature	-40		+85	°C	
Storage Temperature	-55		+125	°C	
Frequency Tolerance	-20		+20	ppm	
Frequency Stability over the Operating Temperature ( ref. to +25°C)	-20		+20	ppm	
Equivalent series resistance (R1)			62	Ω	
Shunt capacitance (C0)			1.80	pF	
Load capacitance (CL)		18		pF	
Drive Level		10	100	μW	
Aging @25±3°C	-2		+2	ppm	First year
Insulation Resistance	500			MΩ	@100Vdc±15V

## FREQUENCY PERTURBATION OVER TEMPERATURE

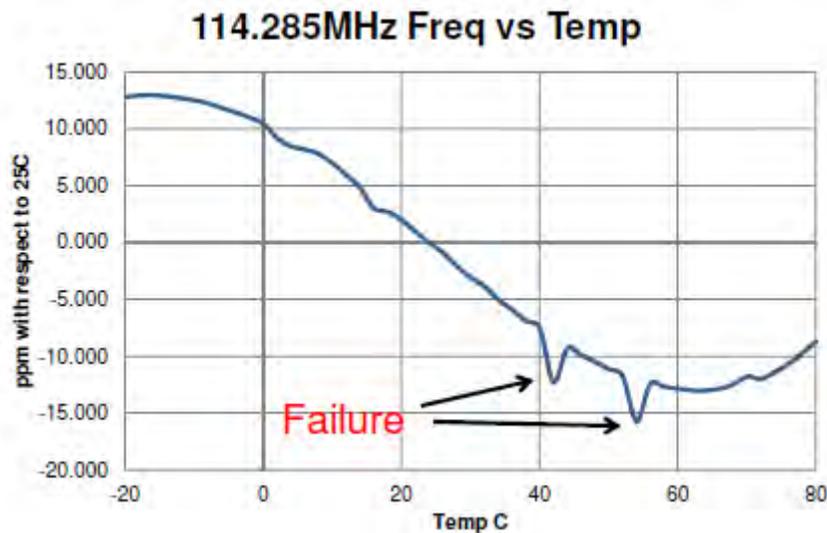


Figure (1)

These Crystals will not exhibit an abrupt change in ESR or frequency, such as caused by Spurious Mode Interference, as shown in figure (1) above. The ABM8-166-114.285MHz-T crystals are optimized to eliminate these abrupt changes, whether as a function of design and/or screening over temperature.

# ULTRA MINIATURE CERAMIC SMD CRYSTAL




ABM8-166-114.285MHz-T

RoHS/RoHS II Compliant

3.2 x 2.5 x 0.75mm

## OUTLINE DRAWING:

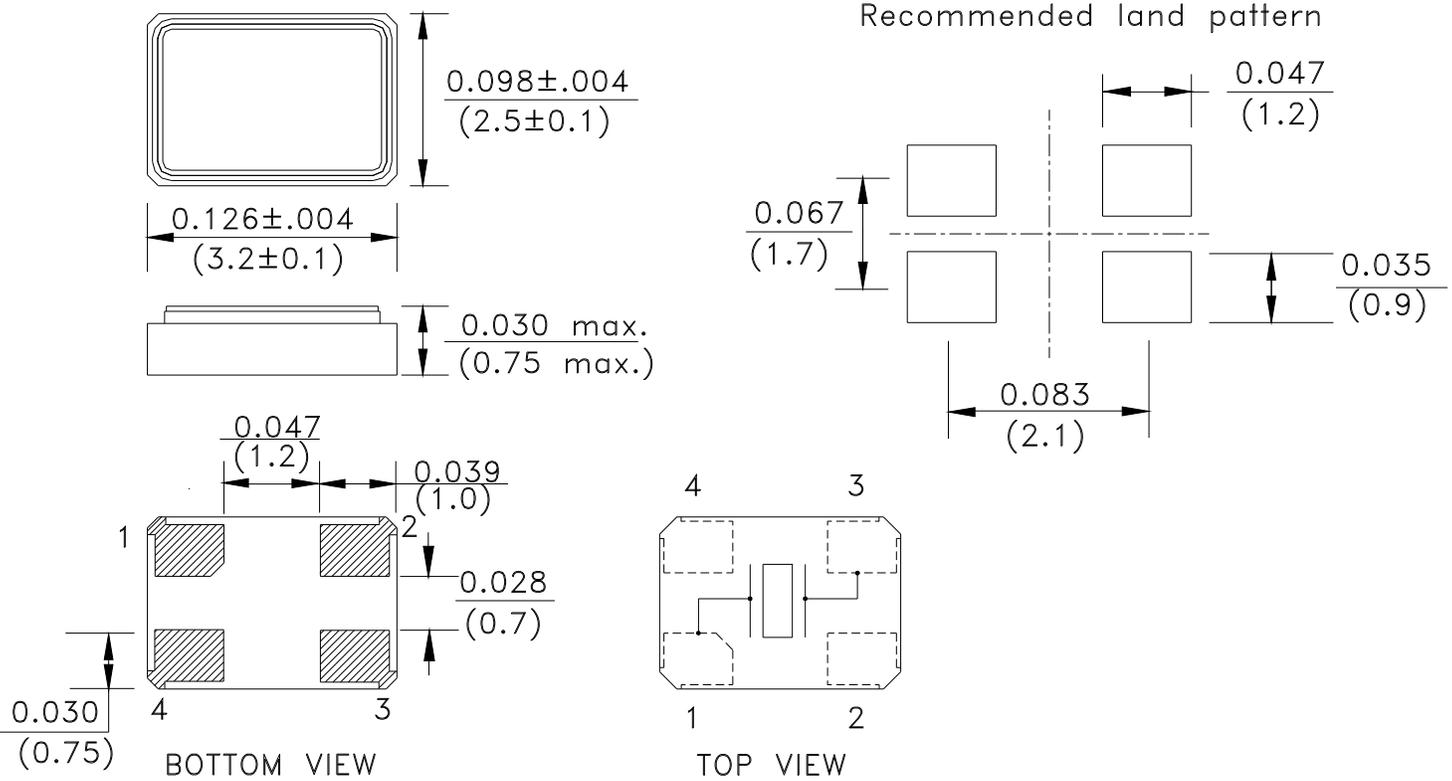

Dimensions: inches (mm)

## REFLOW PROFILE:

